



SCAN IT FOLLOW ME



ADD WECHAT TO LEARN MORE

UnitedStar Industrial Group Limited

Room 1005 Guangdong Maritime Building, No. 48 Baqi 2nd Road, Yuexiu District, Guangzhou, Guangdong, China

Factory address: No.268 Dongfu Road, Dongfeng Town, Zhongshan China

Tel: 0086-20-83527484 / 83514885 Zip: 510080

Mob/Whatsapp/Wechat: 0086-13556009681

E-mail: info@unitedstar.com.cn \ sale@unitedstar.com.cn

Facebook: <https://www.facebook.com/ChinaUnitedstar/>

www.unitedstar.com.cn



2022-2023 CATALOG

DEHUMIDIFIER PORTABLE AIR CONDITIONER



NEW GENERATION SMART MOBILE AIR CONDITIONER

BSCI Certification
R290 Innovative Refrigerant
Class A For Energy Efficiency





ABOUT US

United Star Industrial Group LTD. is an enterprise focusing on research and development, design, production, and sales of environmental household appliance products.

United Star has always adhered to the values of " Deliver Best To Customer, Be Efficient, Be Enterprising ,Be Reliable, Be Dedicated".

United Star has more than 12 years experience in home appliance product development. At present, United Star has a perfect internal structure and has passed the ISO9001 quality system of nearly 42,700 square meters of plant, which includes six workshops of hardware, motor, injection molding, net cover, and final assembly. United Star has the most advanced domestic R290 mobile air conditioning production line, as well as an enthalpy difference laboratory. We have 1133 kinds of products, among them, 82 have their property rights. We mainly produce portable air conditioner, air cooling fans, electric fans, ceiling fans, rechargeable fans, solar fans, and BLDC motors. The group has its own freight forwarding company and has more initiative in trailer and sea transportation.

At present, United Star has six registered trademarks, more than 30 product patents, with GS/CE/CB/ETL/SAA/RoHS/SASO/CCC, and other certificates. United Star has 6 R&D engineers, an average of 13 new products are developed every year. Our products are exported to 126 countries, we wholeheartedly for customers to provide OEM and ODM services.

" To be the most reliable environmental air cooling appliance provider; , Committed to the comfort and environmental protection of the family and the earth environment " is our persistent goal.



National High-tech Enterprise



EU Social Responsibility BSCI



EU RoHS certification



RS 290 Explosion-proof production line

- National High-Tech Enterprise
- 11 years of foreign trade OEM processing experience
- 42700 square meters workshop
- R290 environmentally friendly mobile air conditioner production line
- 3-5 new designs/year

UNITED WORLD · STAR QUALITY

To Be The Most Reliable Environmental
Air Cooling Appliance Provider

Values


Deliver Best To Customer ,
Be Efficient, Be Enterprising ,Be Reliable, Be Dedicated

Mission

Committed To The Comfort And Environmental
Protection Of The Family And The Earth Environment



ENTERPRISE DEVELOPMENT PROGRESS

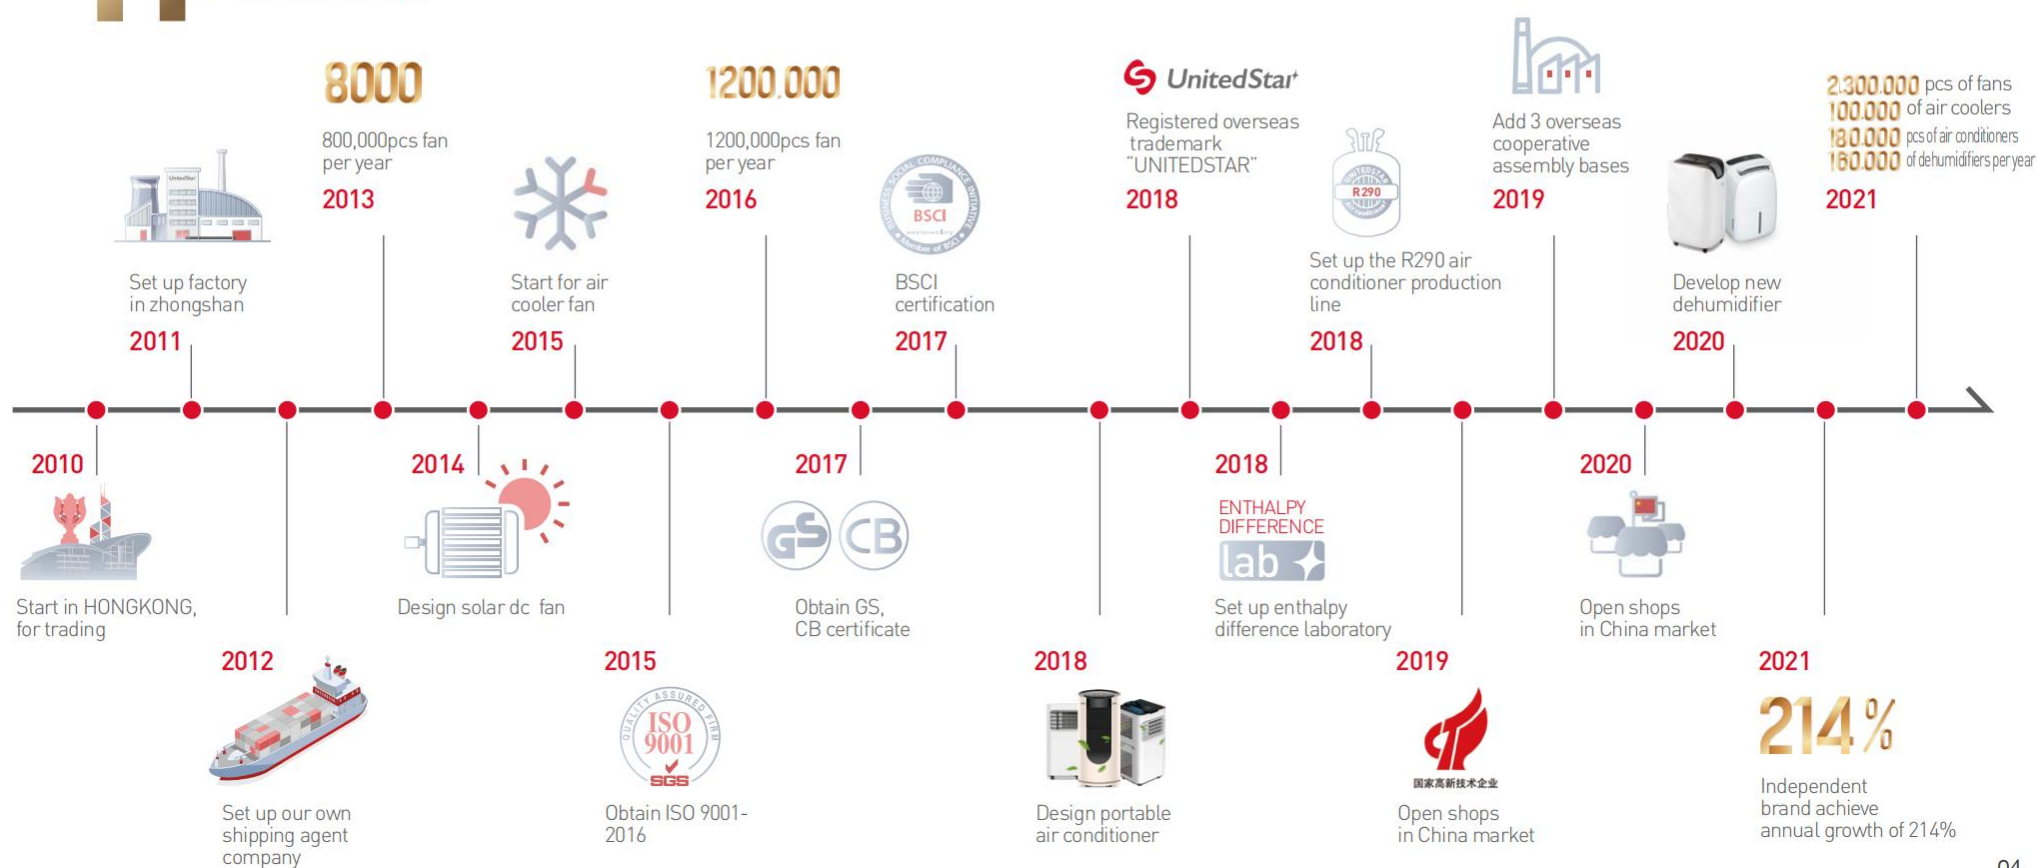

PRODUCT PARAMETERS

PORTABLE AC	制冷量(Btu/h)								WIFI	ANION	ACTIVATED CARBON	HEPA	UVC STERILIZE	PAGE
	3000	5000	7000	9000	12000	14000	16000	22000						
SKY-1A 			●	●					●				●	P.12
SKY-1B 			●	●					●				●	P.14
SKY-1C 			●	●					●				●	P.16
SKY-3A 			●	●	●				●	●			●	P.18
SKY-3B 			●	●	●				●	●			●	P.20
SKY-5A 				●	●				●					P.22
SKY-6A 			●	●	●				●					P.24
SKY-6B 			●	●	●				●					P.26
SKY-7A 				●	●	●			●	●	●	●		P.28
SKY-10A 							●	●	●	●			●	P.30
OAC-2A 	●	●							●					P.32
OAC-2C 	●	●							●					P.34
PORTABLE AC	CAPACITY								WIFI	ANION	ACTIVATED CARBON	HEPA	UVC STERILIZE	PAGE
	10L	12L	18L	30L	40L									
DM-01 	●	●	●						●	●				P.36
DM-02 				●	●				●	●	●			P.38


STERILIZATION

Check the layers to effectively filter bacterial dust. Purify fresh air.



WIFI CONTROL

Adjust the wind and temperature at will, and multiple modes are optional, giving you a new intelligent experience.

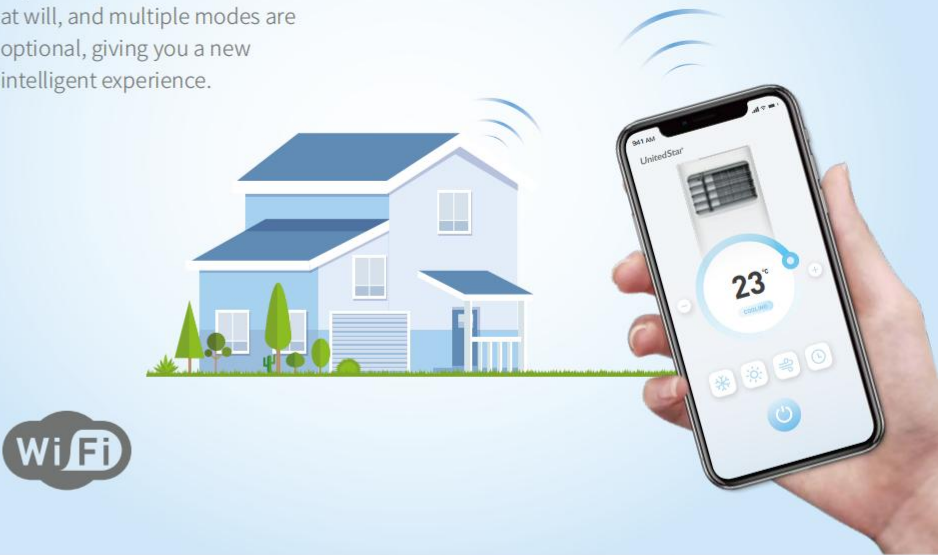

HOT AND COLD DUAL TEMPERATURE REGULATION

UV sterilization is the use of ultraviolet rays of appropriate wavelengths to destroy the molecular structure of DNA (deoxyribonucleic acid) or RNA (ribonucleic acid) in microbial cells




AUTOMATIC THERMOSTAT

Temperature sensor built in the remote control -ler will sense its surrounding temperature . Sothe unit can adjust room temperature moreaccurately and make you more comfortable .



TIMER APPOINTMENT

Set the time from 0 to 24 hours, make an appointment for the wind speed and demeanor, and automatically shut down when the time comes, saving you worry and peace of mind.to have a good sleep at night Antarctic

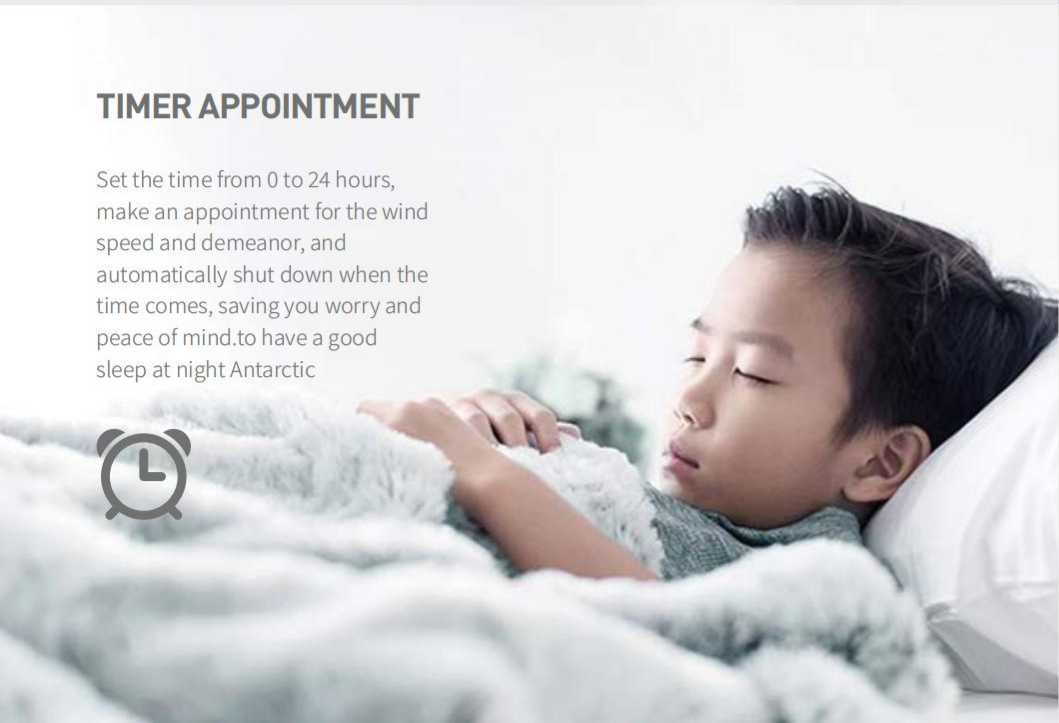

MULTI-LAYER FILTERING

Check the layers to effectively filter bacterial dust. Purify fresh air.




EFFICIENT MOTOR POWER

All copper wire motor, running evenly and stably. Combined into a powerful refrigeration system, the air supply is more stable and safer, and the efficiency is higher.



HIGH ENERGY EFFICIENCY

Adopt high-efficiency compressors and heat exchangers to improve energy efficiency and reduce power consumption through energy-saving technologies.

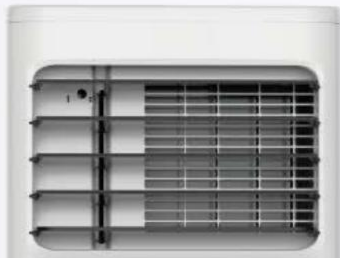


ENVIRONMENTAL FRIENDLY

It adopts environmentally friendly refrigerant R290 refrigerant, which has excellent characteristics of high efficiency and stability, does not destroy the earth's ozone layer, is green and environmentally friendly, and returns to nature and beauty.



HIGH EFFICIENCY HEAT EXCHANGER

The use of double-row heat exchangers and toothed inner spiral copper tubes can effectively improve heat exchange efficiency and defrosting speed, and large-area cooling.

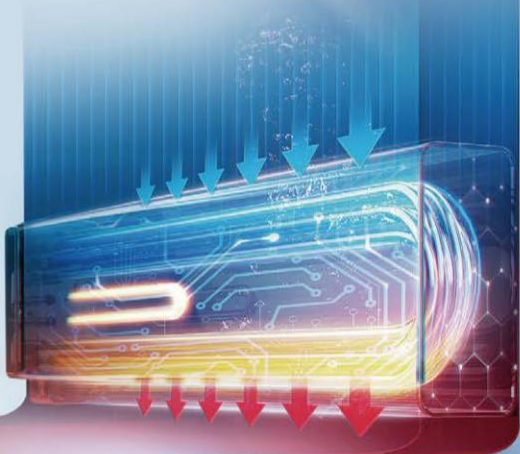

ROTARY COMPRESSOR

Adopt high-efficiency rotary compressor, use permanent magnet material, durable and non-demagnetized, more efficient power during operation, strong cooling and heating, quiet and noise reduction.



EASY INSTALLATION

0.5-1.42 meters retractable baffle, suitable for most families. Distributed exhaust pipe, stretched up to 1.5 meters.



SUMMER MODEL

SKY-1A



LARGE AIR OUTLET

WIRE FRAME

DOUBLE DRAIN



FEATURE

- ERP CLASS A; 3 function in 1 (Air conditioner/ dehumidification/ heater)
- 24-hour timer setting
- Easy to install
- Two drain pipe, dehumidification are separate drain water
- 5000-90000 BTU For Option
- No water out when cooling
- Power cord is easy to store
- Refrigerant: R410A/R290
- Over-cold prevention function
- Remote control; LED Display



Cool



Dehumidification



Speed



Timer



Heater



Remote



Refrigeration



Refrigeration

Model 220-240V,50Hz	SKY-1A05 SKYR-1A05 (5000Btu/h)	SKY-1A07 SKYR-1A07 (7000Btu/h)	SKY-1A08 SKYR-1A08 (8000Btu/h)	SKY-1A09 SKYR-1A09 (9000Btu/h)
EER class	A	A	A	A
Cooling Capacity	1460W	2000W	2344W	2600W
Heating Capacity	1200W	1700W	1900W	2100W
Rating Input(cooling)	555W	780W	880W	985W
Rating Input(heating)	450W	782W	850W	950W
Refrigerant	R410A/R290	R410A/R290	R410A/R290	R410A/R290
Moisture	0.7L/H	0.8L/H	0.9L/H	1.2L/H
Noise Level(high)	≤64db(A)	≤64db(A)	≤64db(A)	≤65db(A)
Air Volume(m³/h)	350m³/h	320m³/h	300m³/h	300m³/h
Application Area(m²)	8~12m²	10~16m²	10~16m²	12~18m²
N.W/G.W.(kg)	19.5/21	20.5/22	21.5/23	22.5/24
Exhaust pipe	Ø150			
Unit Dimension(mm)	330L x 292W x 686.5H			
Package Dimension(mm)	370L x 325W x 875H			
Loading Qty per 20'/40'GP/40'HQ	210/434/650 Sets			
Certificate	CCC/CB	CCC/ CB/ GS/ CE/ ERP	ETL	GS/CE

SUMMER MODEL

SKY-1B



LARGE AIR OUTLET

WIDE FRAME

DOUBLE DRAIN



FEATURE

- ERP CLASS A; 3 function in 1 (Air conditioner/ dehumidification/ heater)
- 24-hour timer setting
- Easy to install
- Two drain pipe, dehumidification are separate drain water
- 5000-90000 BTU For Option
- No water out when cooling
- Refrigerant: R410A/R290
- Over-cold prevention function
- Remote control; LED Display



Cool



Dehumidification



Speed



Timer



Heater



Remote



Refrigeration



Refrigeration

Model 220-240V,50Hz	SKY-1B05 SKYR-1B05 (5000Btu/h)	SKY-1B07 SKYR-1B07 (7000Btu/h)	SKY-1B08 SKYR-1B08 (8000Btu/h)	SKY-1B09 SKYR-1B09 (9000Btu/h)
EER class	A	A	A	A
Cooling Capacity	1460W	2000W	2344W	2600W
Heating Capacity	1200W	1700W	1900W	2100W
Rating Input(cooling)	555W	780W	880W	985W
Rating Input(heating)	450W	782W	850W	950W
Refrigerant	R410A/R290	R410A/R290	R410A/R290	R410A/R290
Moisture	0.7L/H	0.8L/H	0.9L/H	1.2L/H
Noise Level(high)	≤64db(A)	≤64db(A)	≤64db(A)	≤65db(A)
Air Volume(m3/h)	350m³/h	320m³/h	300m³/h	300m³/h
Application Area(m2)	8~12m²	10~16m²	10~16m²	12~18m²
N.W/G.W.(kg)	19.5/21	20.5/22	21.5/23	22.5/24
Exhaust pipe	Ø150			
Unit Dimension(mm)	330L x 292W x 686.5H			
Package Dimension(mm)	370L x 325W x 875H			
Loading Qty per 20' /40'GP/40'HQ	210/434/650 Sets			
Certificate	CCC/ CB	CCC/ CB/ GS/ CE/ ERP	ETL	CCC/ CB/ GS/ CE/ ERP

SUMMER MODEL

SKY-1C



NEW

FEATURE

- ERP CLASS A; 3 function in 1 (Air conditioner/ dehumidification/ heater)
- 24-hour timer setting
- Easy to install
- Two drain pipe, dehumidification are separate drain water
- 5000-90000 BTU For Option
- No water out when cooling
- Refrigerant: R410A/R290
- Over-cold prevention function
- Remote control; LED Display



Model 220-240V,50Hz	SKY-1C05 SKYR-1C05 (5000Btu/h)	SKY-1C07 SKYR-1C07 (7000Btu/h)	SKY-1C08 SKYR-1C08 (8000Btu/h)	SKY-1C09 SKYR-1C09 (9000Btu/h)
EER class	A	A	A	A
Cooling Capacity	1460W	2000W	2344W	2600W
Heating Capacity	1200W	1700W	1900W	2100W
Rating Input(cooling)	555W	780W	880W	985W
Rating Input(heating)	450W	782W	850W	950W
Refrigerant	R410A/R290	R410A/R290	R410A/R290	R410A/R290
Moisture	0.7L/H	0.8L/H	0.9L/H	1.2L/H
Noise Level(high)	≤64db(A)	≤64db(A)	≤64db(A)	≤65db(A)
Air Volume(m³/h)	350m³/h	320m³/h	300m³/h	300m³/h
Application Area(m²)	8~12m²	10~16m²	10~16m²	12~18m²
N.W/G.W.(kg)	19.5/21	20.5/22	21.5/23	22.5/24
Exhaust pipe	Ø150			
Unit Dimension(mm)	330L x 292W x 686.5H			
Package Dimension(mm)	370L x 325W x 875H			
Loading Qty per 20'/40'GP/40'HQ	210/434/650 Sets			
Certificate	CCC/ CB	CCC/ CB/ GS/ CE/ ERP	ETL	CCC/ CB/ GS/ CE/ ERP

DELUXE MODEL

SKY-3A



WIFI CONTROL



WIFI CONTROL

LARGE AIR OUTLET

SMART PANEL



FEATURE

- ERP CLASS A;3 function in 1 (Air conditioner/ dehumidification/ heater)
- 24-hour timer setting
- Easy to install
- Two drain pipe, dehumidification are separate drain water
- 7000-10000 BTU For Option
- No water out when cooling
- Power cord is easy to store
- Refrigerant: R410A/R290
- Auto close the air outlet
- Over-cold prevention function
- Remote control; LED Display



Cool



Dehumidification



Speed



Timer



Heater



Remote



Refrigeration



Refrigeration

Model 220-240V,50Hz	SKY-3A07 SKYR-3A07 (7000Btu/h)	SKY-3A09 SKYR-3A09 (9000Btu/h)	SKY-3A10 SKYR-3A10 (10000Btu/h)
EER class	A	A	A
Cooling Capacity	2050W	2600W	2900W
Heating Capacity	1800W	2400W	2700W
Rating Input(cooling)	780W	950W	1100W
Rating Input(heating)	650W	900W	950W
Refrigerant	R410A/R290	R410A/R290	R410A/R290
Moisture	0.8L/H	1.0L/H	1.1L/H
Noise Level(high)	≤64db(A)	≤64db(A)	≤64db(A)
Air Volume(m³/h)	320m³/h	320m³/h	320m³/h
Application Area(m²)	10~16m²	16~18m²	18~20m²
N.W/G.W.(kg)	25/27	26/28	27/29
Exhaust pipe	Ø150		
Unit Dimension(mm)	353L x 353W x 791H		
Package Dimension(mm)	515L x 400W x 893H		
Loading Qty per 20'/40'GP/40'HQ	122/254/379 Stes		
Certificate	CCC/ CB	CCC/ CB/ GS/ CE/ ERP	CCC/ CB

DELUXE MODEL

SKY-3B



WIFI CONTROL



WIFI CONTROL

SMART PANEL

LARGE AIR OUTLET



NEW

FEATURE



- ERP CLASS A;3 function in 1 (Air conditioner/ dehumidification/ heater)
- 24-hour timer setting
- Easy to install
- Two drain pipe, dehumidification are separate drain water
- 7000-10000 BTU For Option
- No water out when cooling
- Power cord is easy to store
- Refrigerant: R410A/R290
- Auto close the air outlet
- Over-cold prevention function
- Remote control; LED Display



Cool



Dehumidification



Speed



Timer



Heater



Remote



Refrigeration



Refrigeration

Model 220-240V,50Hz	SKY-3B07 SKYR-3B07 (7000Btu/h)	SKY-3B09 SKYR-3B09 (9000Btu/h)	SKY-3B10 SKYR-3B10 (10000Btu/h)
EER class	A	A	A
Cooling Capacity	2050W	2600W	2900W
Heating Capacity	1800W	2400W	2700W
Rating Input(cooling)	780W	950W	1100W
Rating Input(heating)	650W	900W	950W
Refrigerant	R410A/R290	R410A/R290	R410A/R290
Moisture	0.8L/H	1.0L/H	1.1L/H
Noise Level(high)	≤64db(A)	≤64db(A)	≤64db(A)
Air Volume(m³/h)	320m³/h	320m³/h	320m³/h
Application Area(m²)	10~16m²	16~18m²	18~20m²
N.W/G.W.(kg)	25/27	26/28	27/29
Exhaust pipe	Ø150		
Unit Dimension(mm)	353L x 353W x 791H		
Package Dimension(mm)	515L x 400W x 893H		
Loading Qty per 20'/40'GP/40'HQ	122/254/379 Stes		
Certificate	CCC/ CB	CCC/ CB/ GS/ CE/ ERP	CCC/ CB

TORRODO MODEL

SKY-5A



DOUBLE MOTOR

HOT AND COLD
PORT EXCHANGE

IPX40 WATERPROOF



FEATURE

- 3 function in 1 (Air conditioner/ dehumidification/heater)
- 24-hour timer setting
- Easy to install
- Two drain pipe, dehumidification are separate drain water
- 9000-12000 BTU For Option
- No water out when cooling
- Double motor, easy cooling
- Refrigerant: R410A/R290
- IPX24, Out door using
- Over-cold prevention function
- Remote control; LED Display



Model 220-240V,50Hz	SKY-5A10.5 SKYR-5A10.5 (10500Btu/h)	SKY-5A12 SKYR-5A12 (12000Btu/h)
EER class	A	A
Cooling Capacity	3080W	3500W
Heating Capacity	2700W	2900W
Rating Input(cooling)	1050W	1250W
Rating Input(heating)	950W	1050W
Refrigerant	R410A/R290	R410A/R290
Moisture	1.2L/H	1.3L/H
Noise Level(high)	≤65db(A)	≤65db(A)
Air Volume(m³/h)	350m³/h	350m³/h
Application Area(m²)	18~20m²	20~22m²
N.W/G.W.(kg)	31/33	33/35
Exhaust pipe	Ø150	
Unit Dimension(mm)	571L x 326W x 770H	
Package Dimension(mm)	638L x 368W x 855H	
Loading Qty per 20'/40'GP/40'HQ	110/226/339 Stes	
Certificate	CCC/ CB	CCC/ CB/ GS/ CE/ ERP

UNITED WORLD · STAR QUALITY

ANTARCTIC MODEL

SKY-6A



SMART PANEL

AIR OUTPUT
360M³/H

DOUBLE DRAIN

FEATURE

- ERP CLASS A;3 function in 1 (Air conditioner/ dehumidification/ heater)
- 24-hour timer setting
- Easy to install
- Two drain pipe, dehumidification are separate drain water
- 9000-12000 BTU For Option
- No water out when cooling
- Power cord is easy to store
- Refrigerant: R410A/R290
- Auto close the air outlet
- Over-cold prevention function
- Remote control; LED Display



Model 220-240V,50Hz	SKY-6A09 SKYR-6A09 (9000Btu/h)	SKY-6A10 SKYR-6A10 (10000Btu/h)	SKY-6A12 SKYR-6A12 (12000Btu/h)
EER class	A	A	A
Cooling Capacity	2600W	2900W	3500W
Heating Capacity	2300W	2500W	2900W
Rating Input(cooling)	950W	1100W	1340W
Rating Input(heating)	850W	980W	1100W
Refrigerant	R410A/R290	R410A/R290	R410A/R290
Moisture	1.0L/H	1.1L/H	1.5L/H
Noise Level(high)	≤64db(A)	≤64db(A)	≤64db(A)
Air Volume(m³/h)	360m³/h	360m³/h	360m³/h
Application Area(m²)	16~18m²	18~20m²	20~220m²
N.W/G.W.(kg)	26/28	27/29	28.5/30.5
Exhaust pipe	Ø150		
Unit Dimension(mm)	370L x 345W x 715H		
Package Dimension(mm)	447L x 397W x 870H		
Loading Qty per 20'/40'GP/40'HQ	140/290/434 Sets		
Certificate	CCC/ CB	CCC/ CB	CCC/ CB/ GS/ CE/ ERP

SILENT MODEL

SKY-6B



SMART PANEL

AIR OUTPUT
360M²/H

DOUBLE DRAIN



NEW

FEATURE



- ERP CLASS A;3 function in 1 (Air conditioner/ dehumidification/ heater)
- 24-hour timer setting
- Easy to install
- Two drain pipe, dehumidification are separate drain water
- 9000-12000 BTU For Option
- No water out when cooling
- Power cord is easy to store
- Refrigerant: R410A/R290
- Auto close the air outlet
- Over-cold prevention function
- Remote control; LED Display



Model 220-240V,50Hz	SKY-6B09 SKYR-6B09 (9000Btu/h)	SKY-6B10 SKYR-6B10 (10000Btu/h)	SKY-6B12 SKYR-6B12 (12000Btu/h)
EER class	A	A	A
Cooling Capacity	2600W	2900W	3500W
Heating Capacity	2300W	2500W	2900W
Rating Input(cooling)	950W	1100W	1340W
Rating Input(heating)	850W	980W	1100W
Refrigerant	R410A/R290	R410A/R290	R410A/R290
Moisture	1.0L/H	1.1L/H	1.5L/H
Noise Level(high)	≤64db(A)	≤64db(A)	≤64db(A)
Air Volume(m ³ /h)	400m ³ /h	350m ³ /h	350m ³ /h
Application Area(m ²)	16~18m ²	18~20m ²	20~220m ²
N.W/G.W.(kg)	26/28	27/29	28.5/30.5
Exhaust pipe	Ø150		
Unit Dimension(mm)	370L x 345W x 715H		
Package Dimension(mm)	447L x 397W x 870H		
Loading Qty per 20'/40'GP/40'HQ	140/290/434 Sets		
Certificate	CCC/ CB	CCC/ CB	CCC/ CB/ GS/ CE/ ERP

FRESH MODEL

SKY-7A



BLOW UPWARD HEPA STERILIZATION MUTE



NEW

FEATURE



- ERP CLASS A;3 function in 1 (Air conditioner/ dehumidification/ heater)
- 24-hour timer setting
- Easy to install
- Two drain pipe, dehumidification are separate drain water
- 7000-10000 BTU For Option
- No water out when cooling
- Power cord is easy to store
- Refrigerant: R410A/R290
- Auto close the air outlet
- Over-cold prevention function
- Remote control; LED Display



Model 220-240V,50Hz	SKY-7A 10 SKYR-7A10 (10000Btu/h)	SKY-7A12 SKYR-7A12 (12000Btu/h)	SKY-7A14 SKYR-7A14 (14000Btu/h)
EER class	A	A	A
Cooling Capacity	3080W	3500W	4100W
Heating Capacity	3000W	3200W	3800W
Rating Input(cooling)	1050W	1340W	1500W
Rating Input(heating)	1000W	1000W	1200W
Refrigerant	R410A/R290	R410A/R290	R410A/R290
Moisture	1.4L/H	1.6L/H	1.8L/H
Noise Level(high)	≤65db(A)	≤65db(A)	≤65db(A)
Air Volume(m³/h)	440m³/h	440m³/h	440m³/h
Application Area(m²)	18~20m²	20~22m²	22~26m²
N.W/G.W.(kg)	29/31	31/33	33/35
Exhaust pipe	Ø165		
Unit Dimension(mm)	485L x 385W x 769H		
Package Dimension(mm)	638L x 418W x 890H		
Loading Qty per 20'/40'GP/40'HQ	98/204/305 Stes		
Certificate	CCC/ CB	CCC/ CB	CCC/ CB/ GS/ CE/ ERP

FRESH MODEL

DM-01



WIFI CONTROL



WATER TANK

BLOW UPWARD

AIR OUTFALL



NEW

FEATURE



- Dehumidification (clear and rainy days)
- Auxiliary drying
- Sleep mode
- Full protection
- Water tank level visualization
- Filter purification
- Continuous dehumidification
- Automatic defrost
- Power off memory
- 24-hour timing on/off
- Negative ion
- WIFI
- Visual three-color light
- Universal wheel option



Model 220-240V,50Hz	SCF-1A-10 (10L)	SCF-1A-12 (12L)	SCF-1A-18 (18L)
Daily dehumidification	10L	12L	18L
Refrigerant	R290	R290	R290
Quality	10kg	11kg	12kg
Noise	46dB(A)	46dB(A)	46dB(A)
Current	1.13A	1.5A	1.6A
Power	230W	250W	305W
Rated voltage/frequency	220V~/50Hz	220V~/50Hz	220V~/50Hz
Operation method	Touch button	Touch button	Touch button
Water tank capacity	3L	3L	3L
Drainage method	Water tank/external drain	Water tank/external drain	Water tank/external drain
Application area	20~30m ²	24~40m ²	26~50m ²
Bare machine size(mm)	305L x 215W x 480H(With wheels) 305L x 215W x 459H(Without)		
Packing size(mm)	344L*254W*525H		
Container volume 20'/40'/40'HQ	588/1224/1528 Sets		
Certificate	CCC/ CB/ GS/ CE/ ERP		

FRESH MODEL

DM-02



NEW

FEATURE



- Dehumidification (clear and rainy days)
- Auxiliary drying
- Sleep mode
- Full protection
- Water tank level visualization
- Filter purification
- Continuous dehumidification
- Automatic defrost
- Power off memory
- 24-hour timing on/off
- Negative ion
- WIFI
- Visual three-color light
- Universal wheel option



Model 220-240V,50Hz	SCF-2A-30 (30L)	SCF-2A-40 (40L)
Daily dehumidification	30L	40L
Refrigerant	R290	R290
Quality	10kg	11kg
Noise	46dB(A)	46dB(A)
Current	2.48A	2.63A
Power	530W	560W
Rated voltage/frequency	220V~/50Hz	220V~/50Hz
Operation method	Touch button	Touch button
Water tank capacity	3L	3L
Drainage method	Water tank/external drain	Water tank/external drain
Application area	20~30m ²	24~40m ²
Bare machine size(mm)	371L x 251W x 595H	
Packing size(mm)	420L x 303W x 635H	
Container volume 20'/40'/40'HQ	309/630/838 Sets	
Certificate	CCC/ CB/ GS/ CE/ ERP	CCC/ CB/ GS/ CE/ ERP

NEBULA SERIES

SKY-10A



SMART PANEL

AIR OUTPUT: 900M³/H

LED SCREEN



FEATURE

- ERP CLASS A;3 function in 1 (Air conditioner/ dehumidification/ heater)
- 24-hour timer setting
- Easy to install
- Two drain pipe, dehumidification are separate drain water
- 16000-22000 BTU For Option
- No water out when cooling
- Power cord is easy to store
- Refrigerant: R410A/R290
- Auto close the air outlet
- Over-cold prevention function
- Remote control; LED Display



Model 220-240V,50Hz	SKY-10A55 SKYR-10A55 (16000Btu/h)	SKY-10A65 SKYR-60A65 (22000Btu/h)
EER class	A	A
Cooling Capacity	5500W	6500W
Heating Capacity	4000W	6000W
Rating Input(cooling)	2000W	2500W
Rating Input(heating)	1500W	2100W
Refrigerant	R410A/R290	R410A/R290
Moisture	3.3L/H	4.1L/H
Noise Level(high)	≤60db(A)	≤60db(A)
Air Volume(m³/h)	800m³/h	900m³/h
Application Area(m²)	26~30m²	30~35m²
N.W/G.W.(kg)	40/44	44/48
Exhaust pipe	Ø165	
Unit Dimension(mm)	412L x 385W x 1293H	
Package Dimension(mm)	472L x 405W x 1350H	
Loading Qty per 20'/40'GP/40'HQ	110/222/332Stes	
Certificate	CCC/ CB	CCC/ CB

ORION SERIES

OAC-2A



FEATURE

- 3 function in 1 (Air conditioner/ dehumidification/ Supply air)
- 24-hour timer setting
- Easy to install
- Two drain pipe, dehumidification are separate drain water
- 3000-5000 BTU For Option
- No water out when cooling
- Power cord is easy to store
- Refrigerant: R410A/R134a
- Auto close the air outlet
- Over-cold prevention function
- Remote control; LED Display



NEW



Model 220-240V,50Hz	OAC-2A-09 (3000Btu/h)	OAC-2A-15 (5000Btu/h)
EER class	A	A
Cooling Capacity	880W	1460W
Heating Capacity	/	/
Rating Input(cooling)	440W	610W
Rating Input(heating)	/	/
Refrigerant	R134a	R134a
Moisture	0.5L/H	0.7L/H
Noise Level(high)	≤53db(A)	≤53db(A)
Air Volume(m³/h)	260m³/h	260m³/h
N.W/G.W.(kg)	13/15	16/18
Exhaust pipe	Ø150	
Unit Dimension(mm)	307L x 538W x 386H	
Package Dimension(mm)	747L x 330W x 440H	

ORION SERIES

OAC-2A

NEW



PLACEMENT SUGGESTION


Mode 1 A caravan / tent



Air conditioner outside:

The cold air outlet pipe extends into the airtight space, does not occupy the space area, and the noise is lower.


Mode 2 A caravan / tent

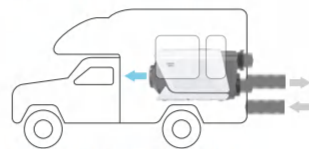

Air conditioning is included:

The hot air surface is equipped with double pipes (intake pipe and exhaust pipe) to protect against theft and rain.

Mode 3 Tent

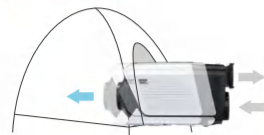

The air conditioner is at the junction of the tent:

The cold tuyere is facing inside the tent and the hot tuyere is facing outward, so it does not need to connect the pipe and is arranged flexibly.

Model	OAC-2C-15
220-240V,50Hz	(5000Btu/h)
EER class	A
Cooling Capacity	1460W
Heating Capacity	/
Rating Input(cooling)	500W
Rating Input(heating)	/
Refrigerant	R410a
Moisture	0.7L/H
Noise Level(high)	≤53db(A)
Air Volume(m³/h)	260m³/h
N.W/G.W.(kg)	16/18
Exhaust pipe	Ø150
Unit Dimension(mm)	307L x 538W x 386H
Package Dimension(mm)	747L x 330W x 440H